

Siena Tiny

DOWNLIGHT

Product Code

MD60



Technical Description

The shoplighting show-off

- The smallest member of the Siena family (trim Ø143mm, cut-out Ø135mm)
- The deep reflector and anti-glare reflector ensure truly impressive glare control and excellent optical comfort
- Improved efficacy (up to 141lm/W at CRI90) with our new Mondolux HE+ chip*
- Reduces the overall power consumption while meeting the new BCA regulations for retail applications*
- Available in standard, high-output HE+ and full-spectrum high-CRI ComfoLED versions
- Maximum tilt angle of 70°
- If you require a customised version of this product, please [contact us](#)

*Applicable for HE+ version

Electrical Specifications


System Power	14W, 19W, 26W
Input Voltage	240V
Control Type	ON/OFF, 0-10V, Phase-Cut, DALI, Casambi
System Efficacy (max.)	141lm/W
Power Factor	> 0.9

Photometric Info

Luminaire Lumens	1500lm, 1975lm, 2100lm, 2625lm, 2730lm, 3475lm
CRI	CRI90
CCT	3000K, 3000K HE+, 3000K Vivid, 3500K, 3500K HE+, 4000K, 4000K HE+
Beam Angle	12°, 20°, 40°, 60°
Lumen Maintenance	> 50, 000hrs (L70 B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	Adjustable Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Weight	1Kgs
Maximum Tilt Angle	70°
Maximum Rotation Angle	350°
Fitting Material	Aluminium

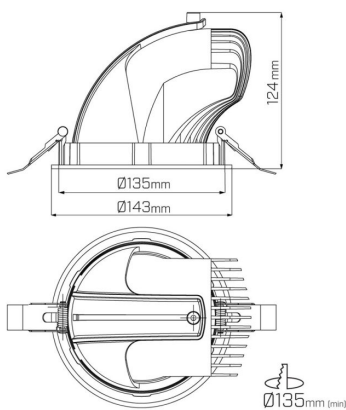

Polar Distribution Diagrams

Siena Tiny 60°

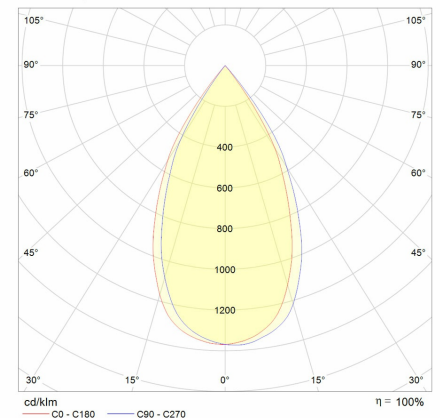

Siena Tiny

DOWNLIGHT

Siena Tiny 40°

