

Mons-D

TRUNKING SYSTEMS



Product Code

MR22,MR25



Technical Description

The complete solution...

- Introducing Mons-D LED Trunking system; highly efficient, clean and sleek design aesthetic ideal for commercial, architectural and residential lighting applications
 - Saving energy: Improved efficiency, up to 135lm/W at CRI90
 - Saving installation costs: Modular and tool-free operation
 - Saving maintenance costs: 5 years warranty*
 - Amazing add-on features: Emergency/Sensor/Dimming/Track modules
 - Pre-wired trunking rail with 7 wires and 3 pins for easy phase selection
 - For more information watch the Video [here](#)
 - If you require a customised version of this product, please [contact us](#)
- *Please see Warranty Terms & Conditions for further information.

Electrical Specifications



System Power	21W, 27W, 30W, 37W
Input Voltage	240V
Control Type	ON/OFF, 0-10V, DALI, Casambi
System Efficacy (max.)	135lm/W
Power Factor	> 0.9

Physical Characteristics

Installation Method	Surface Mounted / Suspended
Trim Finish	White, Black
IP Rating / IK Rating	IP50/ IK05
Weight	4.2Kgs
Fitting Material	Aluminium


Photometric Info

Luminaire Lumens	2800lm, 3645lm, 4050lm, 4995lm
CRI	CRI90
CCT	3000K, 4000K
Beam Angle	120°, 50°, 80°
Lumen Maintenance	> 54, 000hrs (L70 B30)
MacAdam Step	3 Step

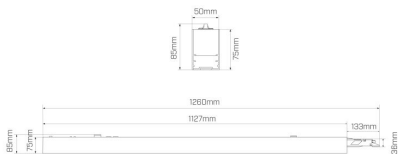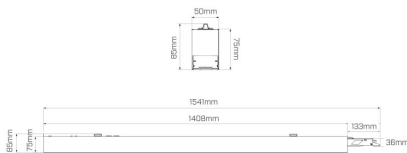


Polar Distribution Diagrams

Mons-D 50°

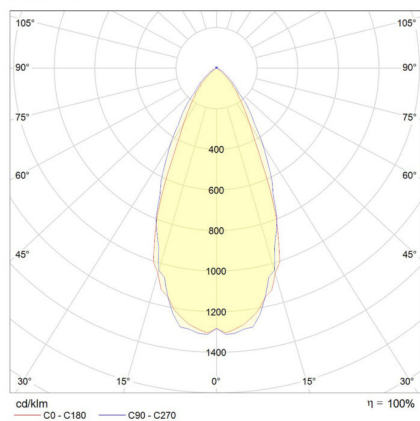

Mons-D 120°

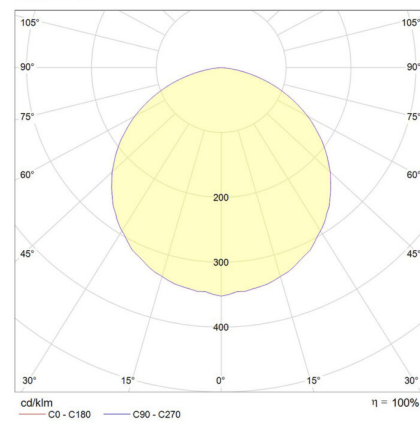

Mons-D 80°

